



Plotted by : KDOT#CADD.Support_ks.gov 7-OCT-2022 21:25
File : te412.dgn



STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	0	0	0	0

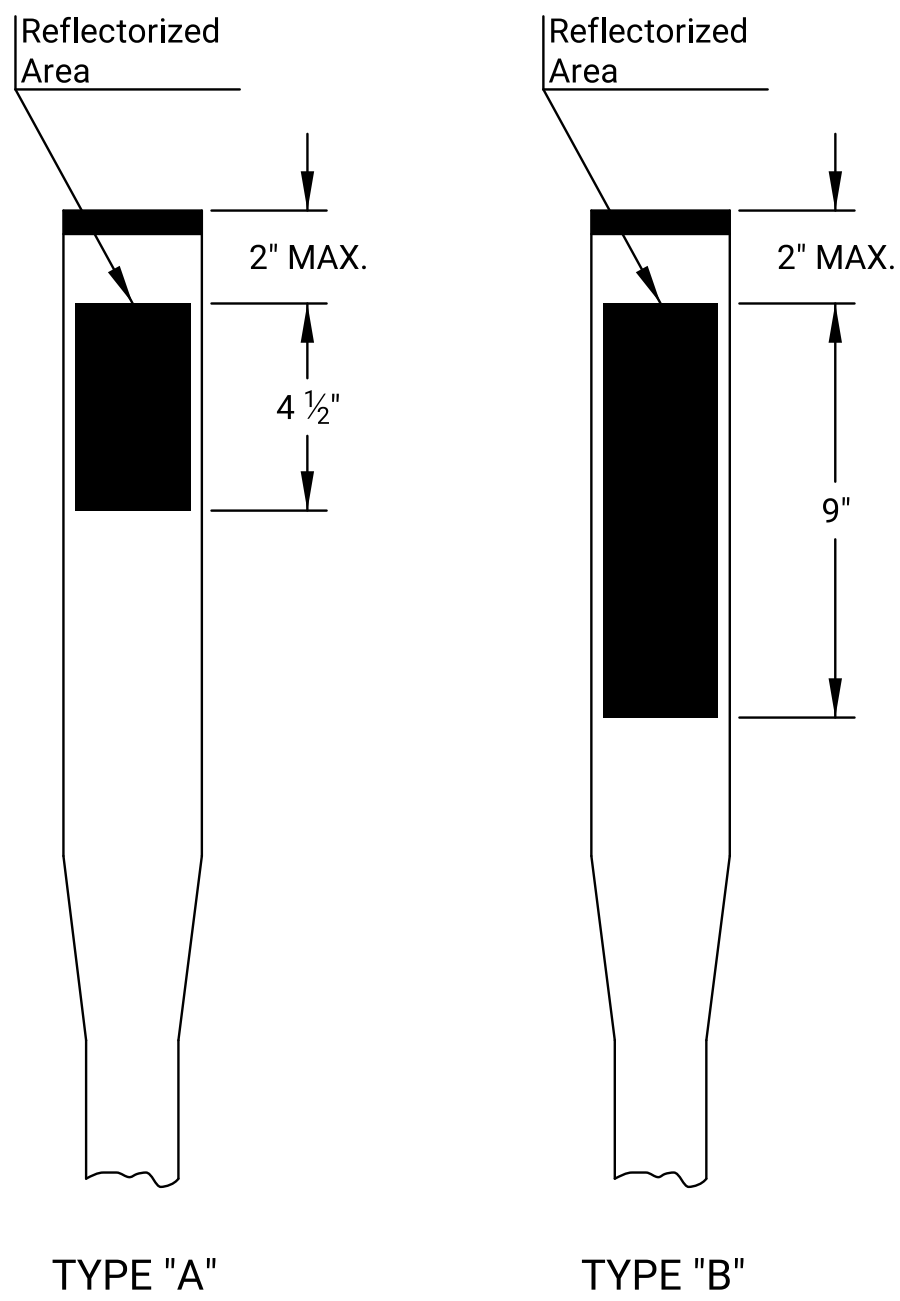


REFLECTORIZED AREA POSITIONING

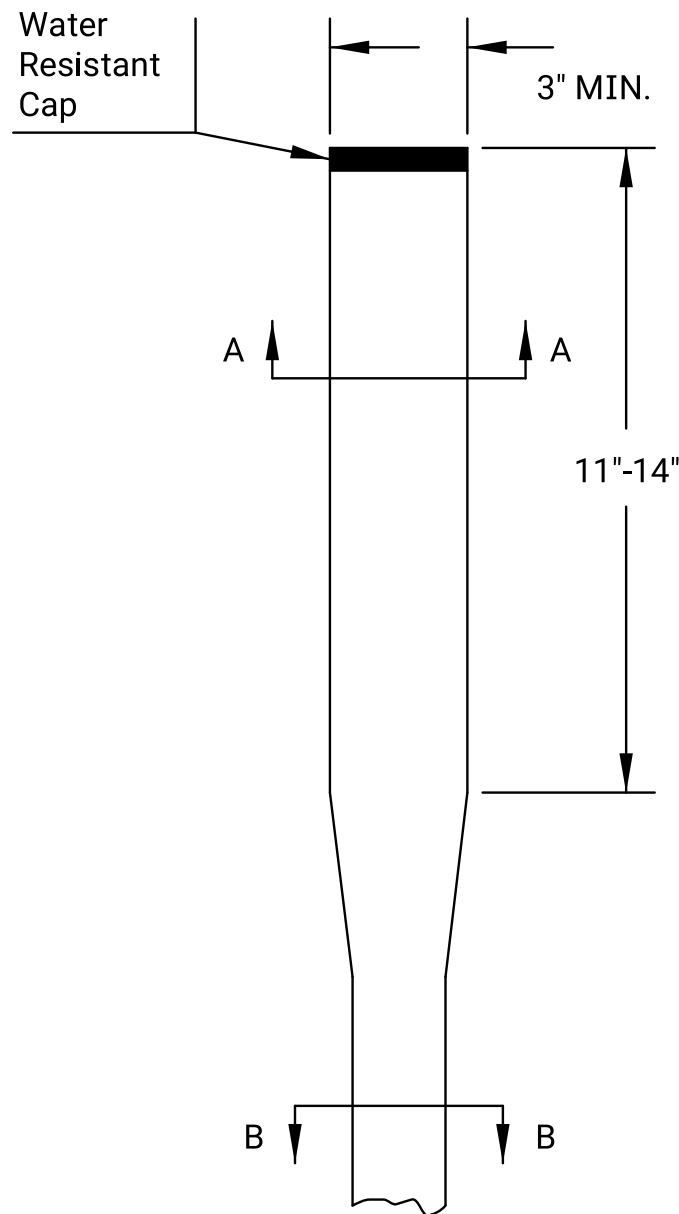

FLEXIBLE DELINEATOR POST DETAILS

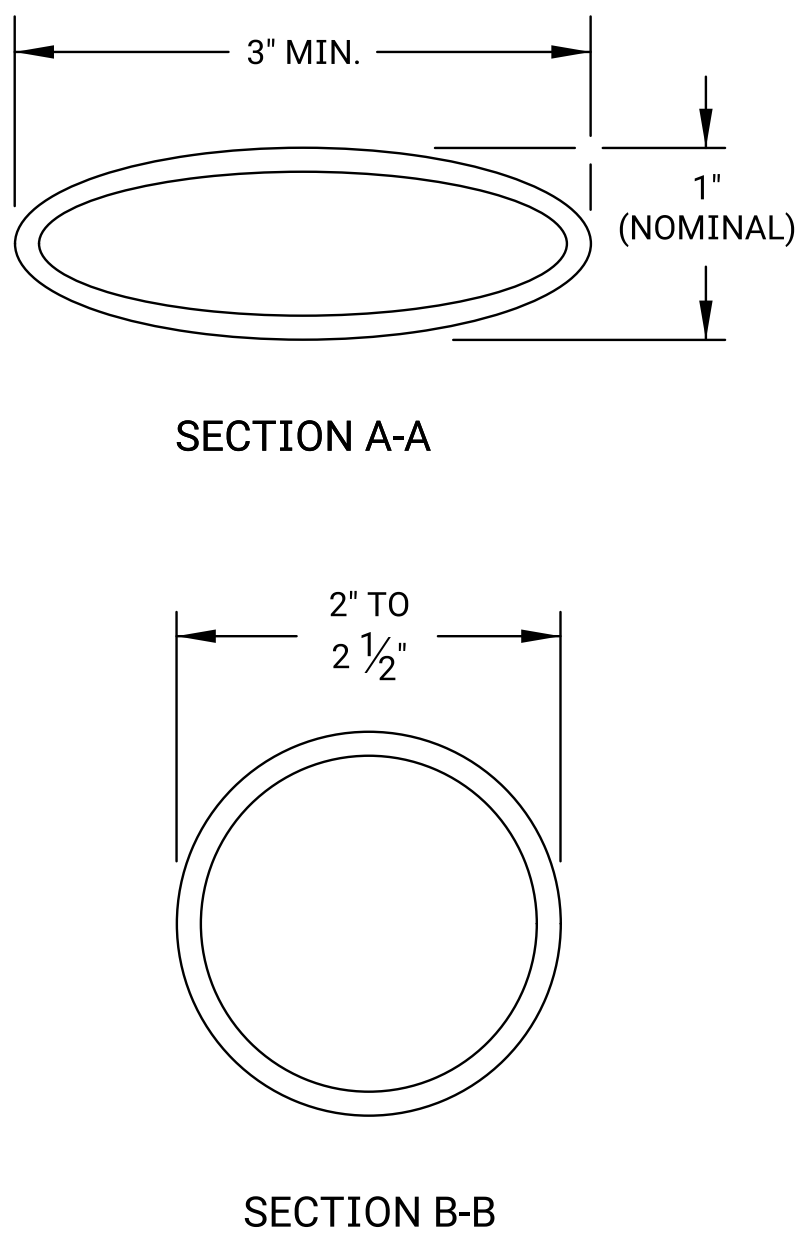

TYPE I

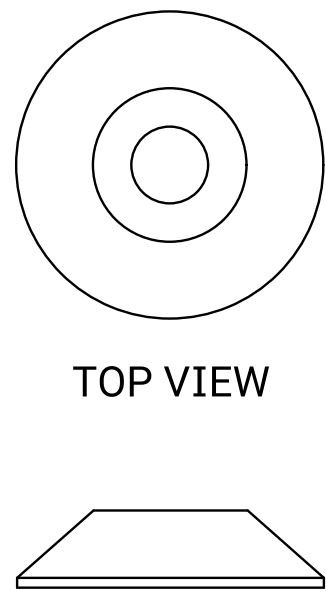


TYPE III

ANCHORING DEVICES


GENERAL NOTE:
See the "Design Details for Positioning of Delineators" standard and/or plan sheets for the delineator spacing, type, and color. The delineators shall be covered with Type XI High Intensity white or yellow retroreflective sheeting.

FLEXIBLE POST DELINEATORS:
The total length of the flexible delineator post shall be determined by the contractor, as per location and anchoring device. The reflectorized area for flexible delineators shall be a minimum of 3" in width.

STEEL POST DELINEATORS:
See flat sheet sign blank standard sheets for the 3" x 8" delineators details.

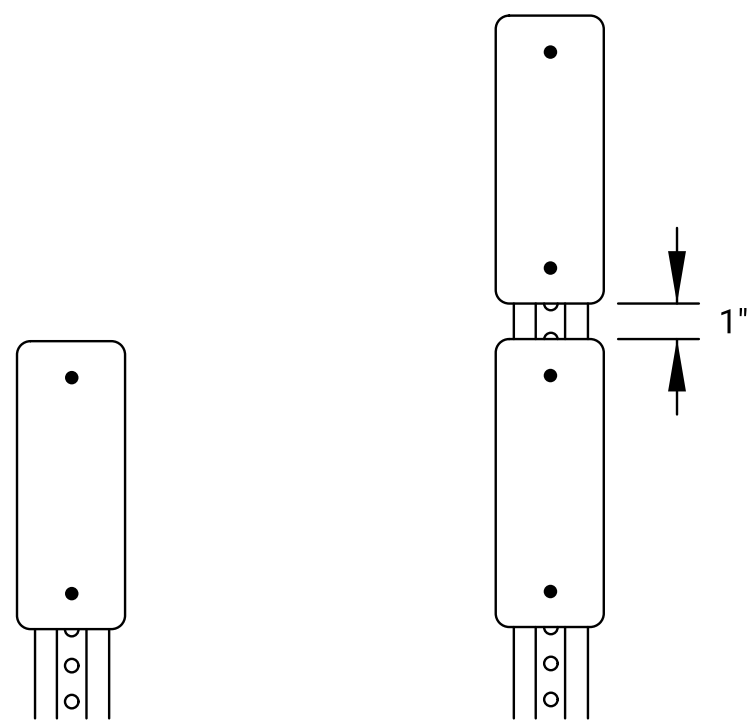


TYPICAL DELINEATOR ASSEMBLY

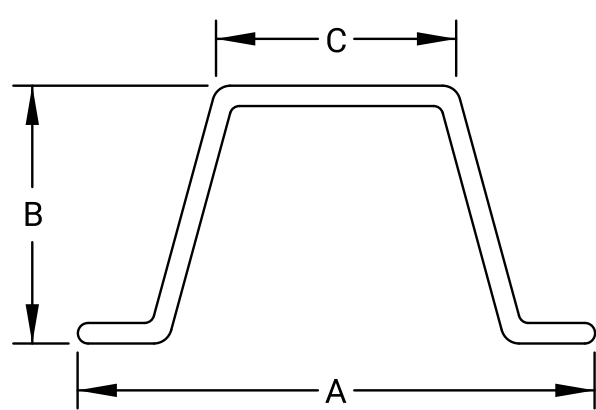


DIMENSIONS	
A	2 1/16
B	7/8
C	1 3/16


(Dimensions are nominal)

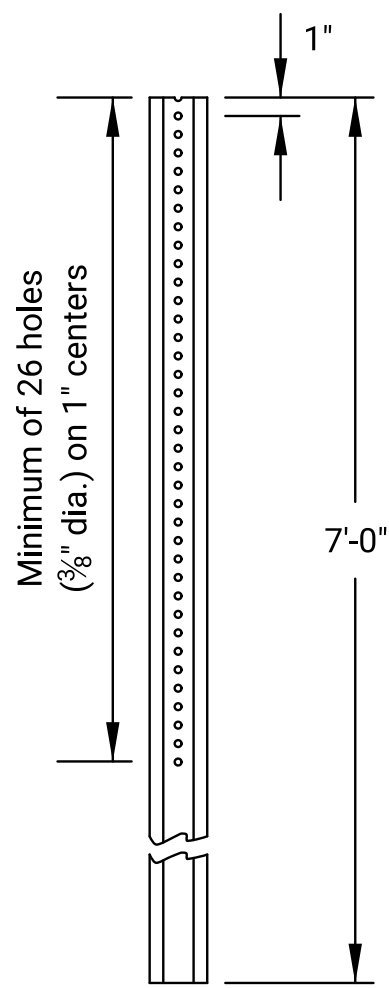

PUNCHING DETAILS

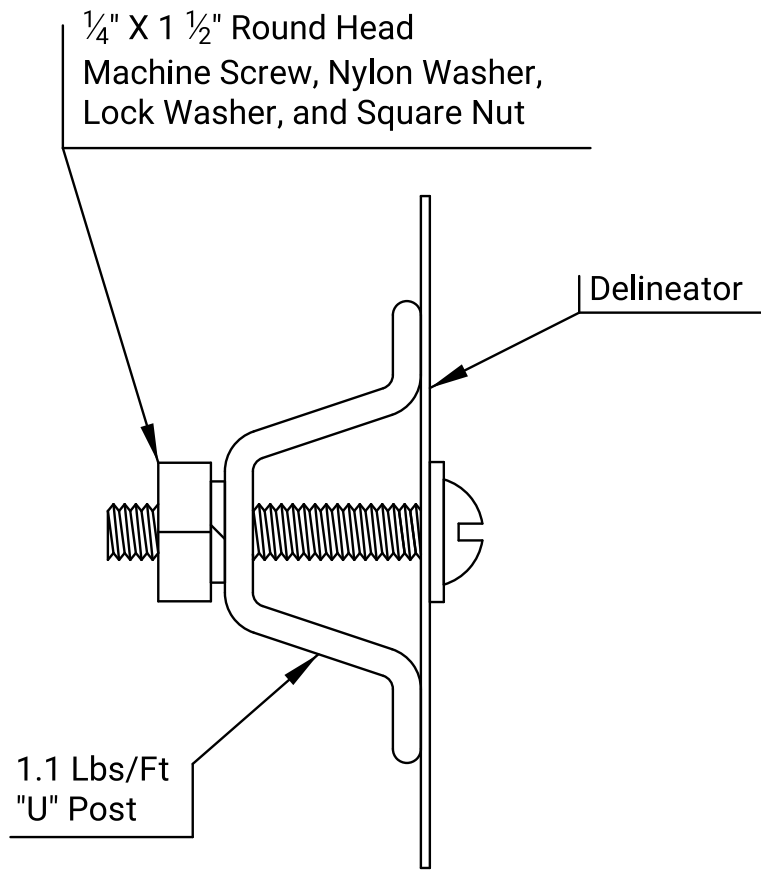

MOUNTING DETAILS (TYPICAL)

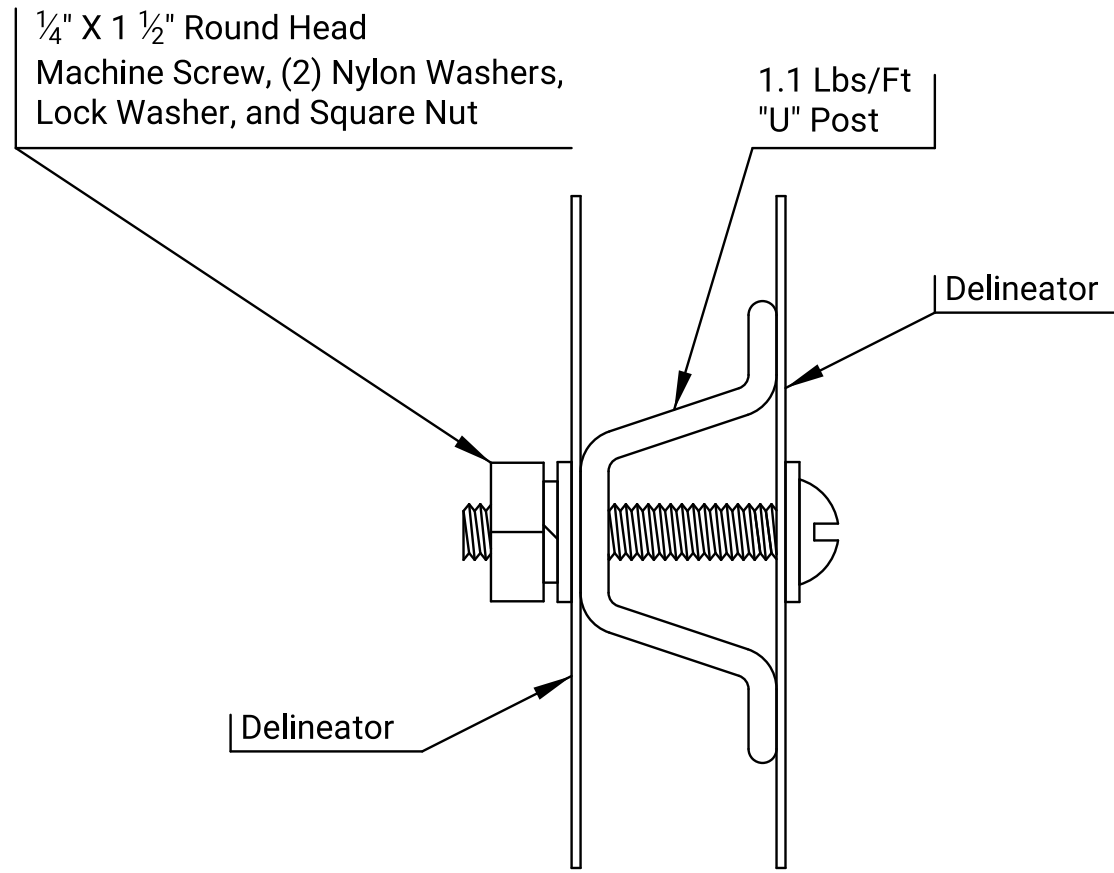

MOUNTING DETAILS (BACK TO BACK)

STEEL POST DELINEATOR INSTALLATION

All dimensions are in inches unless otherwise noted.
See standard plan sheet TE590 for detailed specifications.

KANSAS DEPARTMENT OF TRANSPORTATION					
DESIGNED		D.D.G.		QUANTITIES	
DESIGN CK.		S.A.B.		TRACE CK.	
NO.		DATE		REVISIONS	
BY		APPD		BY	
02		10-01-19		Changed drawings and notes	
01		07-23-10		Changed Sheeting Type	
STEVEN A. BUCKLEY		STEVEN A. BUCKLEY		STEVEN A. BUCKLEY	
DESIGNED		D.D.G.		QUANTITIES	
DESIGN CK.		S.A.B.		TRACE CK.	
TE412		10-01-19		APPD.	
07-01-03		07-07-2022		Sh. No. 0	