


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	XX-XX XX-XXXX-XX	XXXX	XXX	XXX




KR4-3a;
1.50" Radius, 0.63" Border, 0.38" Indent, Black on White;
[KEEP] D; [RIGHT] D;
[EXCEPT] C; [TO PASS] D;
Table of distances between letter and object lefts.

5.72	K	E	E	P		5.72
	3.50	3.19	3.18	2.69		
4.66	R	I	G	H	T	4.66
	3.62	1.56	3.63	3.44	2.43	
3.95	E	X	C	E	P	3.95
	2.68	3.02	2.86	2.68	2.86	
3.13	T	O	P	A	S	3.13
	2.39	5.11	2.58	3.07	2.58	
					2.01	

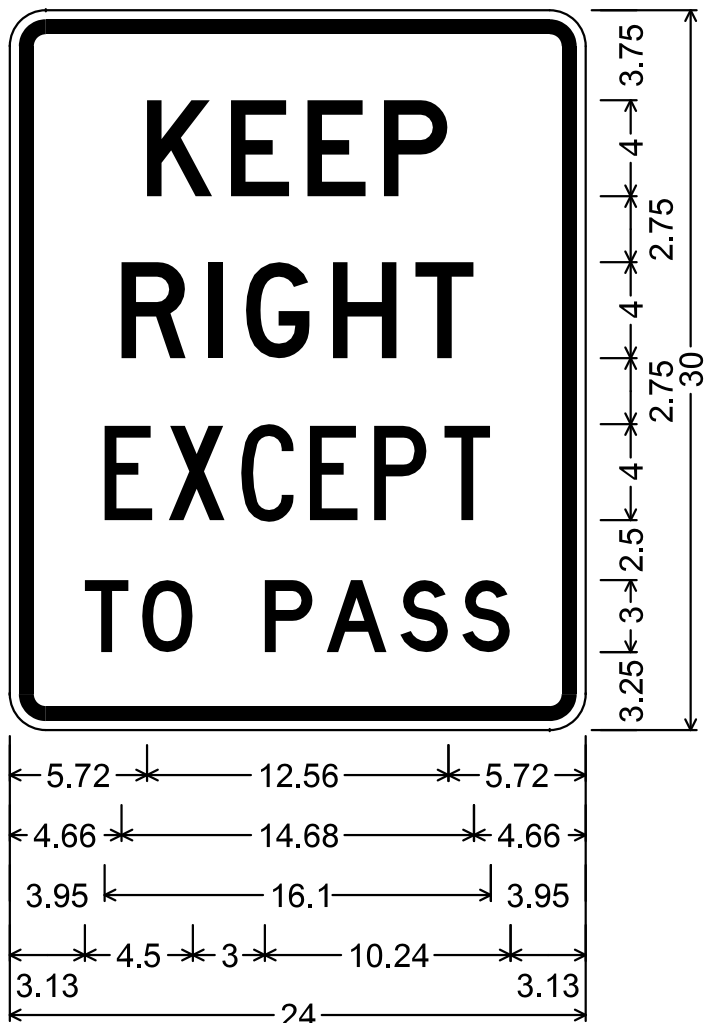

KR5-11 ;
1.5" Radius, 0.5" Border, 0.5" Indent, Black on White;
[\$] C; [10] D; [TO] C; [\$] C; [500] D; [FINE] D; [FOR] D;
[LITTERING] D; [HIGHWAYS] D;
Table of distances between letter and object lefts.

2.9	\$	1	0	T	0	\$	5	0	0		2.9
	1.5	1.5	2.8	1.4	2.1	1.5	2.6	2.7	2.1		
7.9	F	I	N	E		7.9					
	2.4	1.2	2.7	1.9							
9.6	F	O	R								
	1.6	1.9	1.3	9.6							
5.7	L	I	T	T	E	R	I	N	G	1.4	5.7
	1.6	0.7	1.3	1.6	1.6	1.8	0.8	1.8			
5.4	H	I	G	H	W	A	Y	S			5.4
	1.8	0.8	1.8	1.7	1.9	1.8	2.1	1.3			

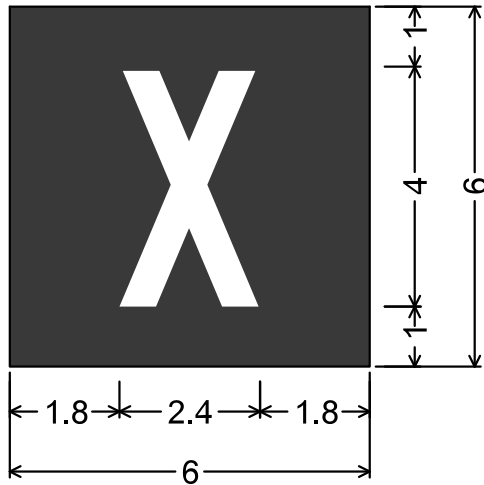

KRM Series ;
No border, None on Green;
[X] White C;
Table of distances between letter and object lefts.

1.8	X	1.8
	2.4	


NOTE: See plan or quantity sheet for number and sign designation.



KR7-1;
1.5" Radius, 0.6" Border, 0.4" Indent, Red on White;
[NO] C;
[PARKING] B specified length;
[ANY] C; [TIME] C;
Double Headed Arrow Custom - 15.5" 0";
Table of distances between letter and object lefts.


8.0	N	O	8.0					
	4.5	3.5						
2.3	P	A	R	K	I	N	G	2.2
	2.9	3.6	3.1	3.0	1.3	3.0	2.6	
7.7	A	N	Y	7.7				
	3.2	2.9	2.5					
7.2	T	I	M	E	7.2			
	2.7	1.4	3.5	2.0				
4.3	15.4	4.3						

NOTE: See plan or quantity sheet for arrow direction and sign designation:
KR7-1 - double headed arrow
KR-1R - arrow pointing to the right
KR-1L - arrow pointing to the left.

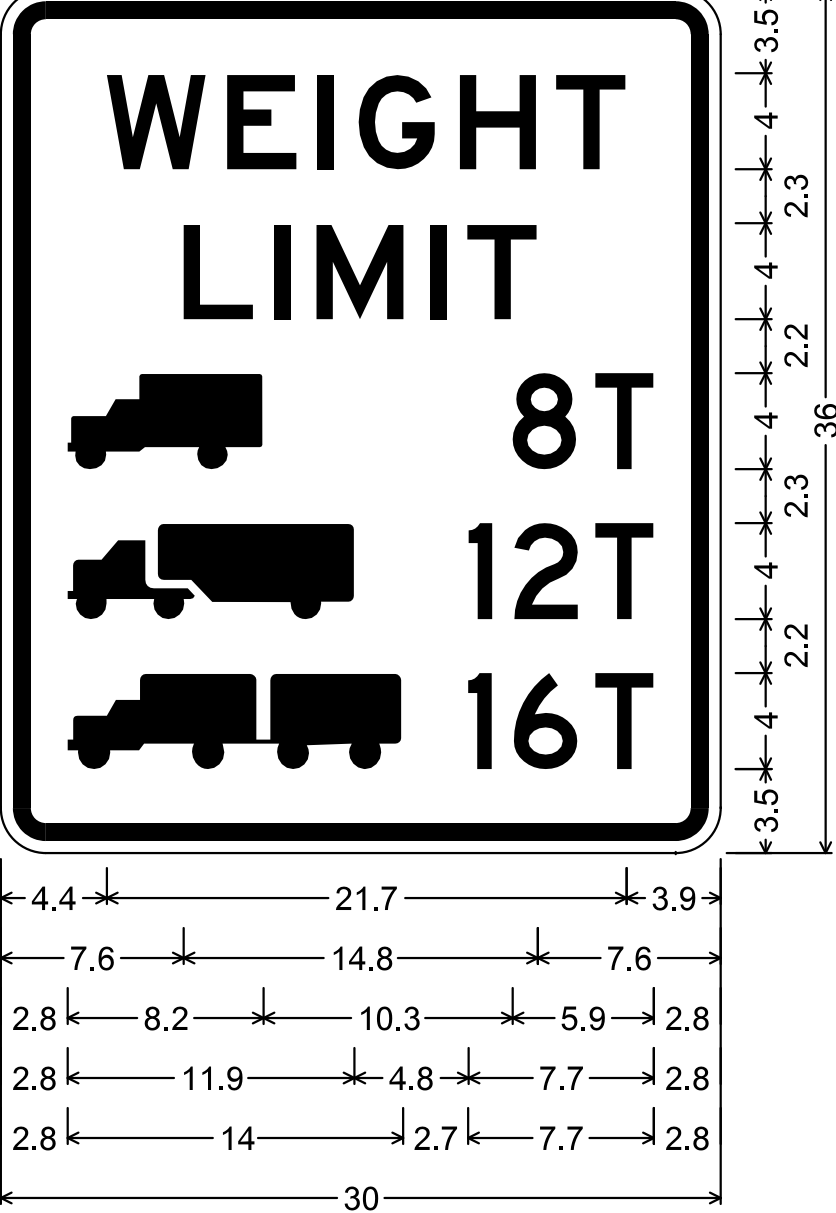

KR12-5;
1.9" Radius, 0.8" Border, 0.5" Indent, Black on White;
[WEIGHT] E; [LIMIT] E 103% spacing;
Symbol RG190; [8T] D; Symbol RG193;
[12T] D; Symbol RG196; [16T] D;
Table of distances between letter and object lefts.

4.4	W	E	I	G	H	T		3.9
	5.0	3.8	1.7	4.2	4.0	3.0		
7.6	L	I	M	I	T		7.6	
	3.8	1.8	4.7	1.5	3.0			
2.8		8	T					
	18.5	3.5	2.4	2.8				
2.8		1	2	T				
	16.7	1.9	3.4	2.4	2.8			
2.8		1	6	T				
	16.7	1.9	3.4	2.4	2.8			

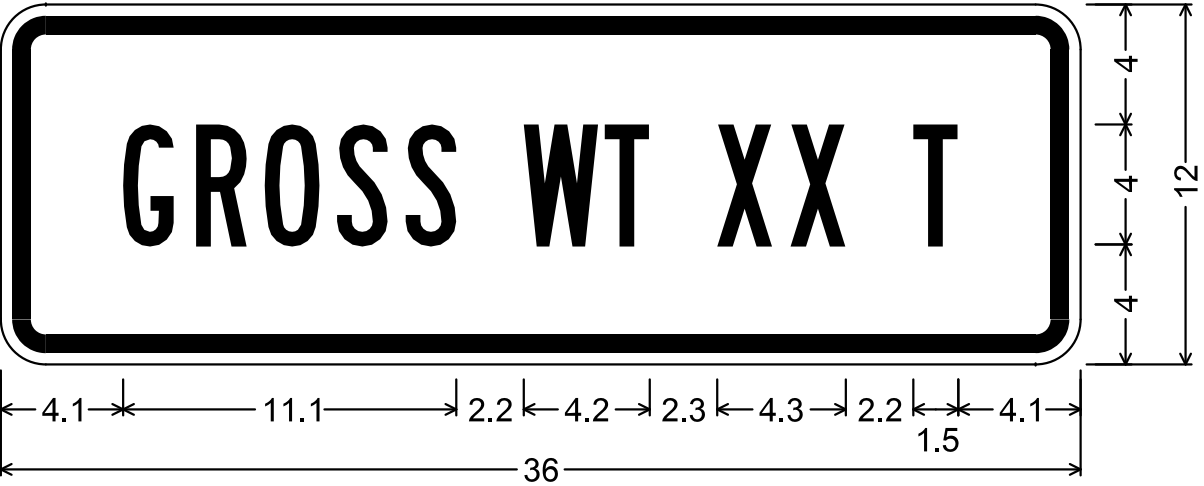

KR12-5a ;
1.5" Radius, 0.6" Border, 0.4" Indent, Black on White;
[GROSS] B; [WT] B; [XX] B; [T] B;
Table of distances between letter and object lefts.

4.1	G	R	O	S	S	W	T	X	X	T	4.1
	2.4	2.3	2.4	2.3	3.9	2.7	3.8	2.4	4.1	1.5	

NOTE: See plan or quantity sheet for the weights on the KW12-5 and KW12-5a signs.

1	11/29/11	Current Release	D.D.G.	M.D.F.	
NO.	DATE	REVISIONS	BY	APPD	
KANSAS DEPARTMENT OF TRANSPORTATION TYPICAL DESIGN DETAILS FOR KR & KRM SERIES SIGNS					
TE621					
FHWA APPROVAL		APPD			
DESIGNED	DETAILED	QUANTITIES	TRACED		
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK.		