STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	0	0	0	0

EXHIBIT

2" DIA. PRE-STAMPED ALUMINUM CAPS

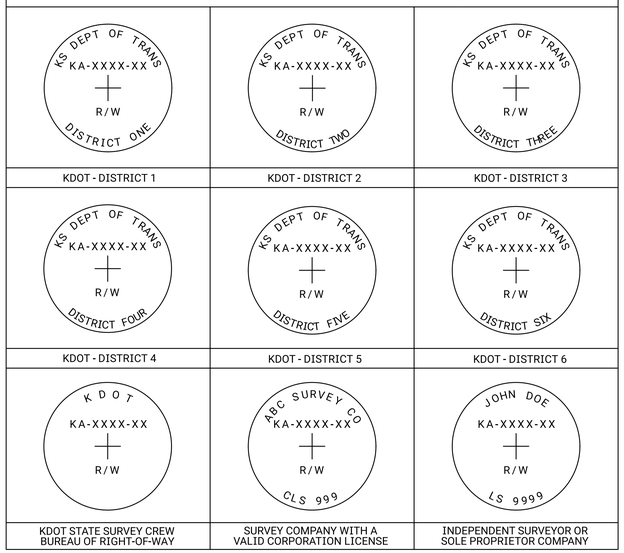

NOTES:

KA-XXXX-XX is the KDOT Project number
All stampings, forgings, and impressions shall be in accordance with the standard specifications and as shown on this drawing.

KI-107

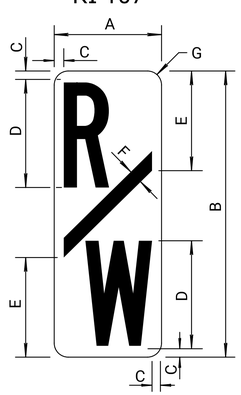

COLORS:

BACKGROUND - WHITE (REFLECTIVE)
LEGEND - BLACK (NON-REFLECTIVE)
LEGEND SERIES - 'B'

A	B	C	D	E	F	G
3"	8"	¼"	3"	2¾"	⅜"	⅜"

R/W SIGN DETAIL

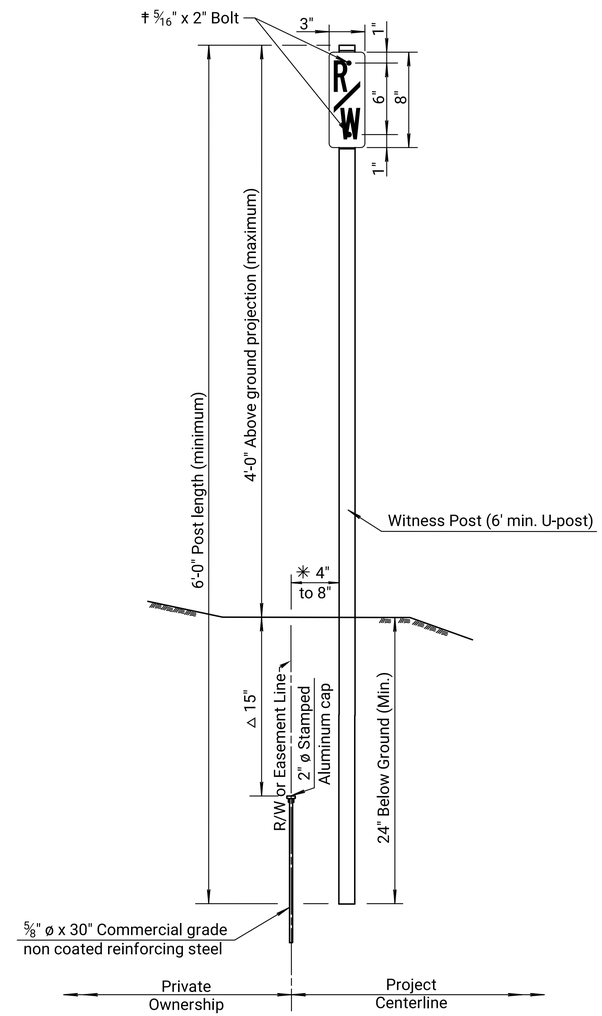

PLAN VIEW

NOTES

✳ 4" (Min.) to 8" (Max.) from rebar to witness post. (USE CAUTION, DO NOT DISTURB THE REBAR WHEN SETTING A POST). The witness post shall be set radial or perpendicular to the project centerline from the rebar. The "open face" of the U-post shall face the project centerline with the sign attached to the "open face". This exhibit is a side view, except for the sign, which is shown as turned for the purpose of illustrating content only. (See Sign Detail).

‡ Drill or punch holes. Attach 2 flat washers, 1 lock washer, and 1 nut per bolt.

△ Or as directed by the Engineer.

GENERAL NOTE

The post shall be U-shaped (6' minimum length) and factory painted the color of persian red (KDOT Orange) by an electronically powder-coated oven-baked process.

All installations shall have proper identification cap for the party installing it (See Exhibit). Monument(s) shall be set in accordance with the standard specifications and as shown on this drawing.

Removal and disposal of existing concrete R/W markers shall not be paid for directly but shall be Subsidiary to other items of the contract.

In an urban area, the witness post may be omitted as directed by the Engineer.

The R/W survey monuments shall be paid for under the bid item "Right-of-Way Survey Monuments (Each)" and be included in the plan quantities. ✡The table shown on this sheet is intended for additional monuments set in the field and will be filled out by the contracted survey company.

Mount R/W survey monument signs facing the road.

✡ Additional R/W Survey Monuments set by Contractor

Station	Offset (Lt./Rt.)	Northing	Easting

✡ Additional R/W Survey Monuments set by Contractor

Station	Offset (Lt./Rt.)	Northing	Easting

NO.	DATE	REVISIONS	BY	APP'D
04	01-06-16	Revised Notes	T.T.R.	S.W.K.
03	05-24-13	Revised General Note	S.W.K.	J.O.B.
02	02-07-07	Removed dual cap note	S.W.K.	J.O.B.

KANSAS DEPARTMENT OF TRANSPORTATION

R/W SURVEY MONUMENT INSTALLATION DETAIL SHEET

RD995

FHWA APPROVAL		03-16-16	APP'D. Scott W. King
DESIGNED	DETAILED	QUANTITIES	TRACED
DESIGN CK.	DETAIL CK.	QUAN.CK.	TRACE CK.

KDOT Graphics Certified 02-02-2026 Sh. No. 0

KDOT Graphics Certified

Plotted by : Amy.Rockers@ks.gov 2-FEB-2026 21:59
File : rd995.dgn