



STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	0	0	0	0

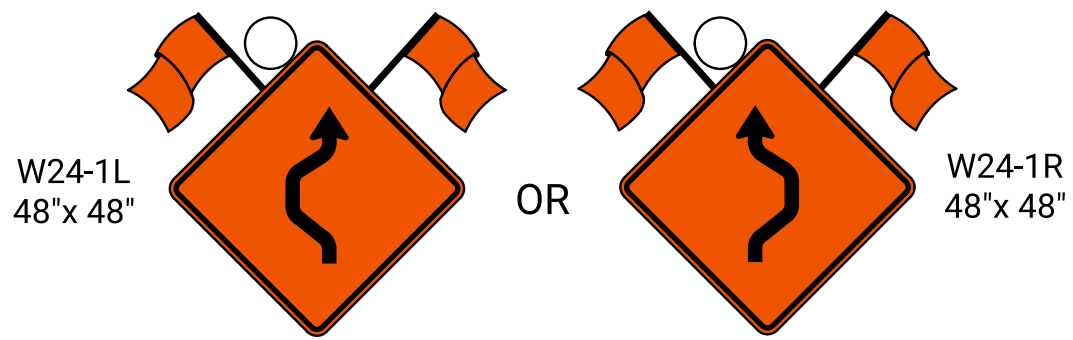

One W24-1 should be used per approach where the tangent distance between two reverse curves is less than 600 ft. If used, use in place of the first W1-4 and eliminate the second.

TYPICAL TEMPORARY STRUCTURE END TREATMENT ON SHOOFLY

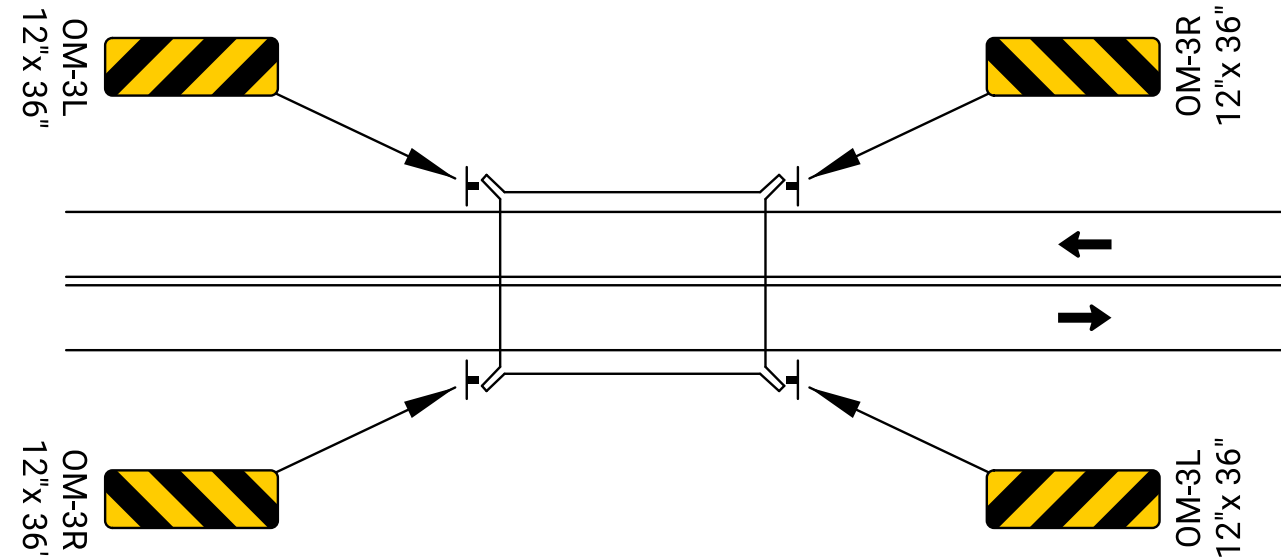

The entire area of object marker shall have ASTM Type III sheeting. The stripes shall slope downward to the traffic side for channelizing.

** Black on orange 24" x 30" chevron signs (W1-8) shall be mounted back to back on the outside edge of shoofly curves with a radius of 1000' or less at the spacing shown below. A minimum of 3 chevrons should be installed per curve.

Suggested Chevron Spacing	
Curve Radius	Max. Spacing
1000' - 800'	100'
800' - 450'	80'
Less than 450'	60'

